NEPTUNE


Product Specification Sheet

Series	BT10E Series 10 µl Eppendorf™ Style Barrier Tip	2140 Series 10 µl Eppendorf™ Style Tip	
Part Number	BT10E	2140	2142 2142.S
Graduation Marks	Graduation marks are indicated at both 0.5 μl, 2 μl and 10 μl locations Refer to product image for visuals		
Tip Composition	Neptune pipette tips are made of virgin polypropylene		
Тір Туре	S³- Low Retention		
Filter Material	High Density Polyethlene Filter	igh Density Polyethlene Filter Non-Filtered Products	
Offered in Sterile Format	Yes	No	Yes
Configuration	Racked	Bulk	Racked
Packaging Breakdown	96 tips/ rack 10 racks/ pack 5 packs/ case	1000 tips/ bag 20 bags/ case	96 tips/ card 20 cards/ pack 4 packs/ case
Autoclavable	No Autoclavable at 120 °C for 10-15 minutes at 15 PSI		
Storage Condition	Store in a clean, dry environment at room temperature 15-30˚C		

BT10E Series

FILTER DEPTH = 1.111in AXX. VOLUME = 13UL 1.80in

2140 Series

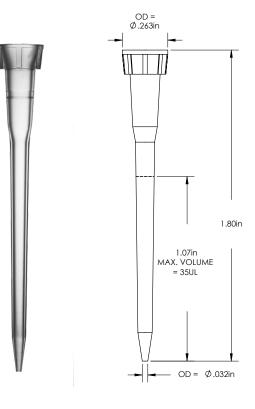

Product Specification Sheet

Quality Control:

Certificates of Compliance	Each lot undergoes stringent inspection and indiviadual lot testing ensures Neptune products are certified RNase, DNase, DNA and Endotoxin-free. Visit www.neptunescienfific.com to obtain a copy of a certificate of compliance for your Neptune product.	
RNase/ DNase	Products are washed in distilled water and concentrated via centrifugation. Samples are added to previously established nucleic acid standards, incubated for one hour at 37°C, and tested on a 2% gel using electrophoresis. Products must show no degradation of standards to pass. Test sensitivity is 10-7 Kunitz units/µl.	
Nucleic Acid	Products are washed in distilled water and concentrated via centrifugation. Then, samples are added to protocol specified PCR reactions and thermal cycled for 50 cycles. A 2% agarose gel electrophoresis is used to examine experimental samples, positive controls, and negative controls. To pass, product samples must show no DNA amplification. Test sensitivity is 10 ng.	
Endotoxin/ Pyrogen	Products are tested for endotoxins by using the Limulus Amebocyte Lysate (LAL) gel assay according to FDA guidelines. Test sensitivity is 0.06 EU/ml.	
Sterilization	Products are sterilized using electron beam irradiation.	
Traceability Each product contains a 5 digit lot number located on the rack, pack and case of each finished good. With Nep-tun advanced manufacturing process all raw materials are able to be traced for maximum quality assurance.		

Advancements in Liquid Handling

S³	Neptune's exclusive S³ polymer was designed to increase pipetting accuracy by virtually eliminating tip retention and sample hold-up.
ESP Reload	Neptune's ESP (Environmental Sustainable Pack) was the industry's first pipette reload system designed to minimize plastic waste by 90% and provide an environmentally friendly solution.
Aerosol Barrier Tip	Specifically enginerred to reduce cross contamination.

Pipettor Compatibility:

Biohit Proline™ 10 µl

Brand Transferpette S™

10 µl Capp™ 10 µl

CLP Beta-Pette™ 2 µl and 10 ul

CLP Poseidon™ 2 µl and 10 ul

CLP Poseidon Electronic™ 20 µl

Eppendorf Reference™ 2.5 µl

(works with 2040 series)

Eppendorf Research™ 2.5 µl

(works with 2040 series)

Eppendorf Research™ 10 µl
Eppendorf Research Plus™ 2.5 µl
(works with 2040 series)
Eppendorf Research Plus™ 10 µl
Eppendorf Xplorer™ 10 µl
Finnpipette™ 10 µl and 50 µl
Finnpipette™ Electronic 10 µl
Finnpipette F1™ 10 µl
Gilson Plpetman™ P2 and P10
Hamilton™ 2 µl and 10 µl
Nichiryo Nichipet EX™ 10 µl

Nichiryo Oxford Benchmate™ 2 µl Nichiryo Oxford Multimate™ 10 µl Socorex Calibri 822™ 10 µl VWR Ultra High Performance™ 2 µl and 10 µl

